

FIG. 1

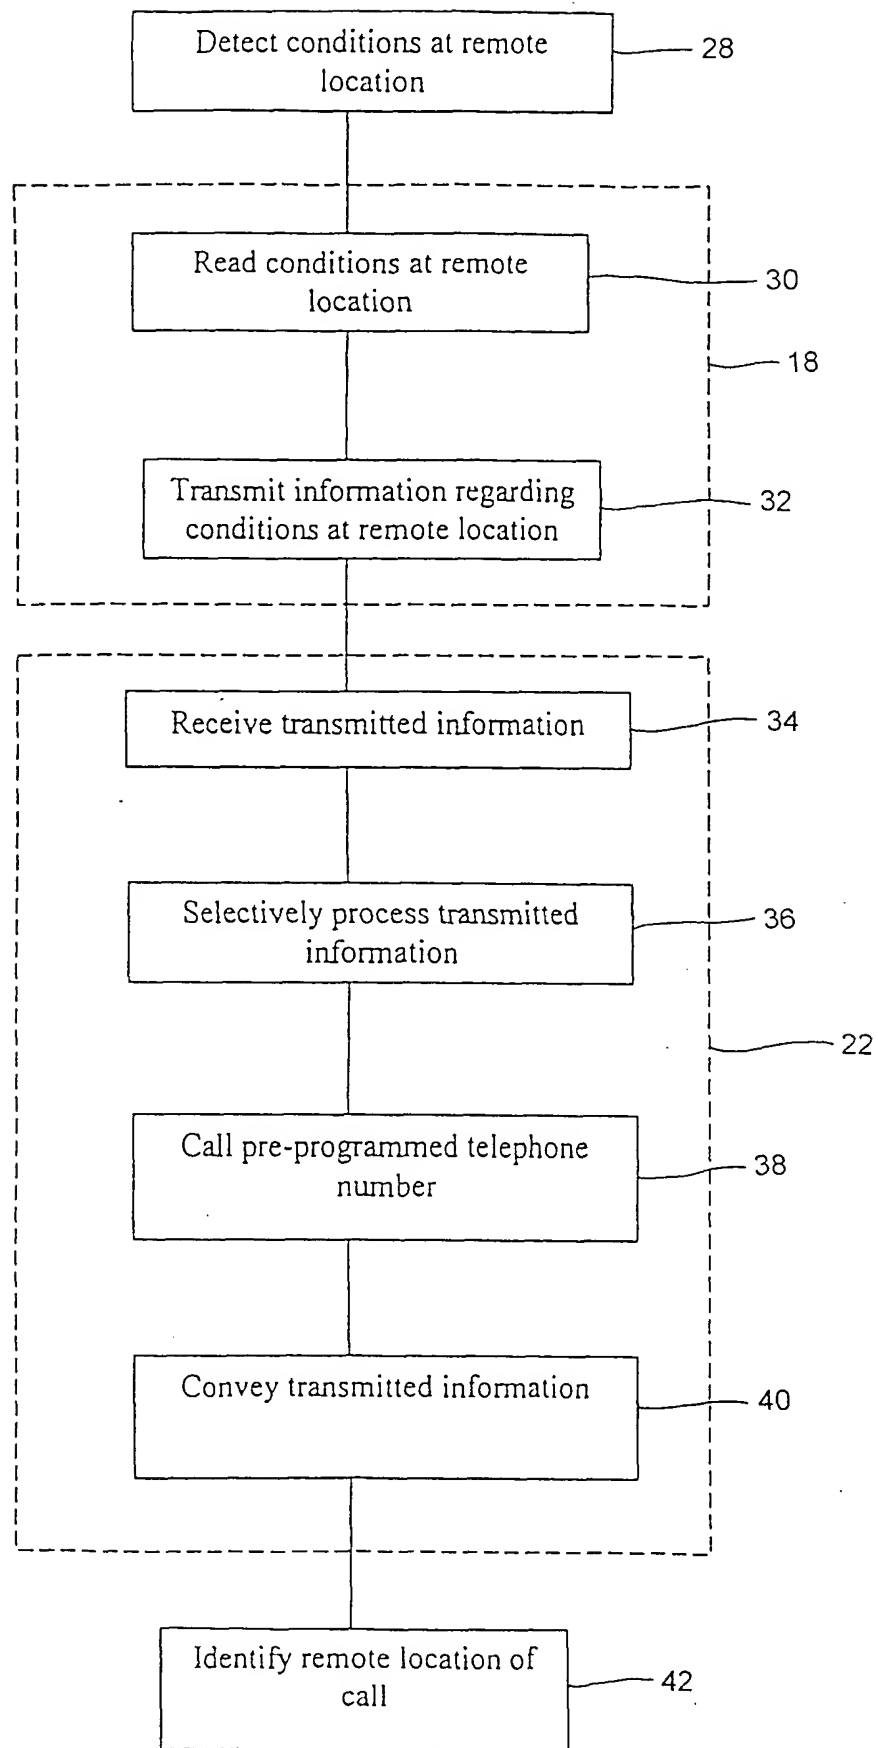


FIG. 2

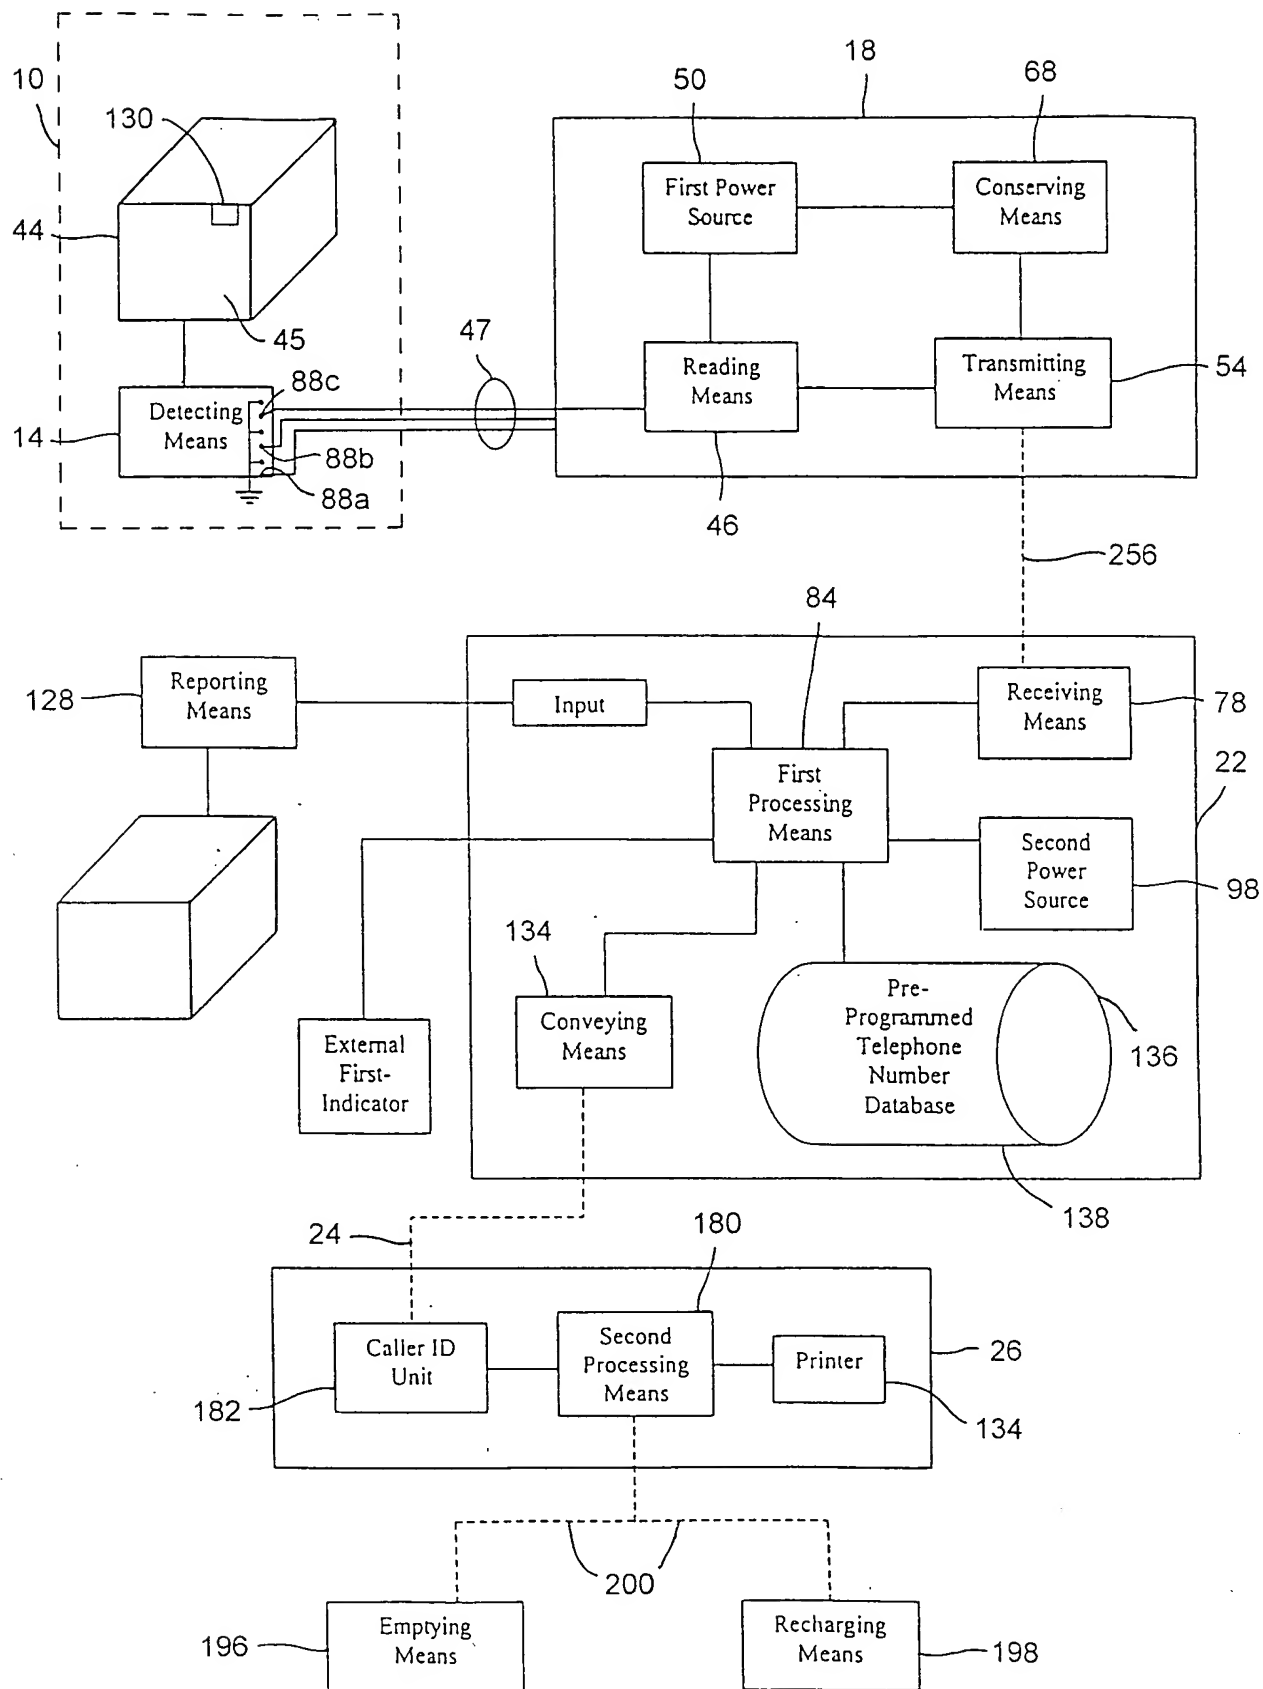


FIG. 3

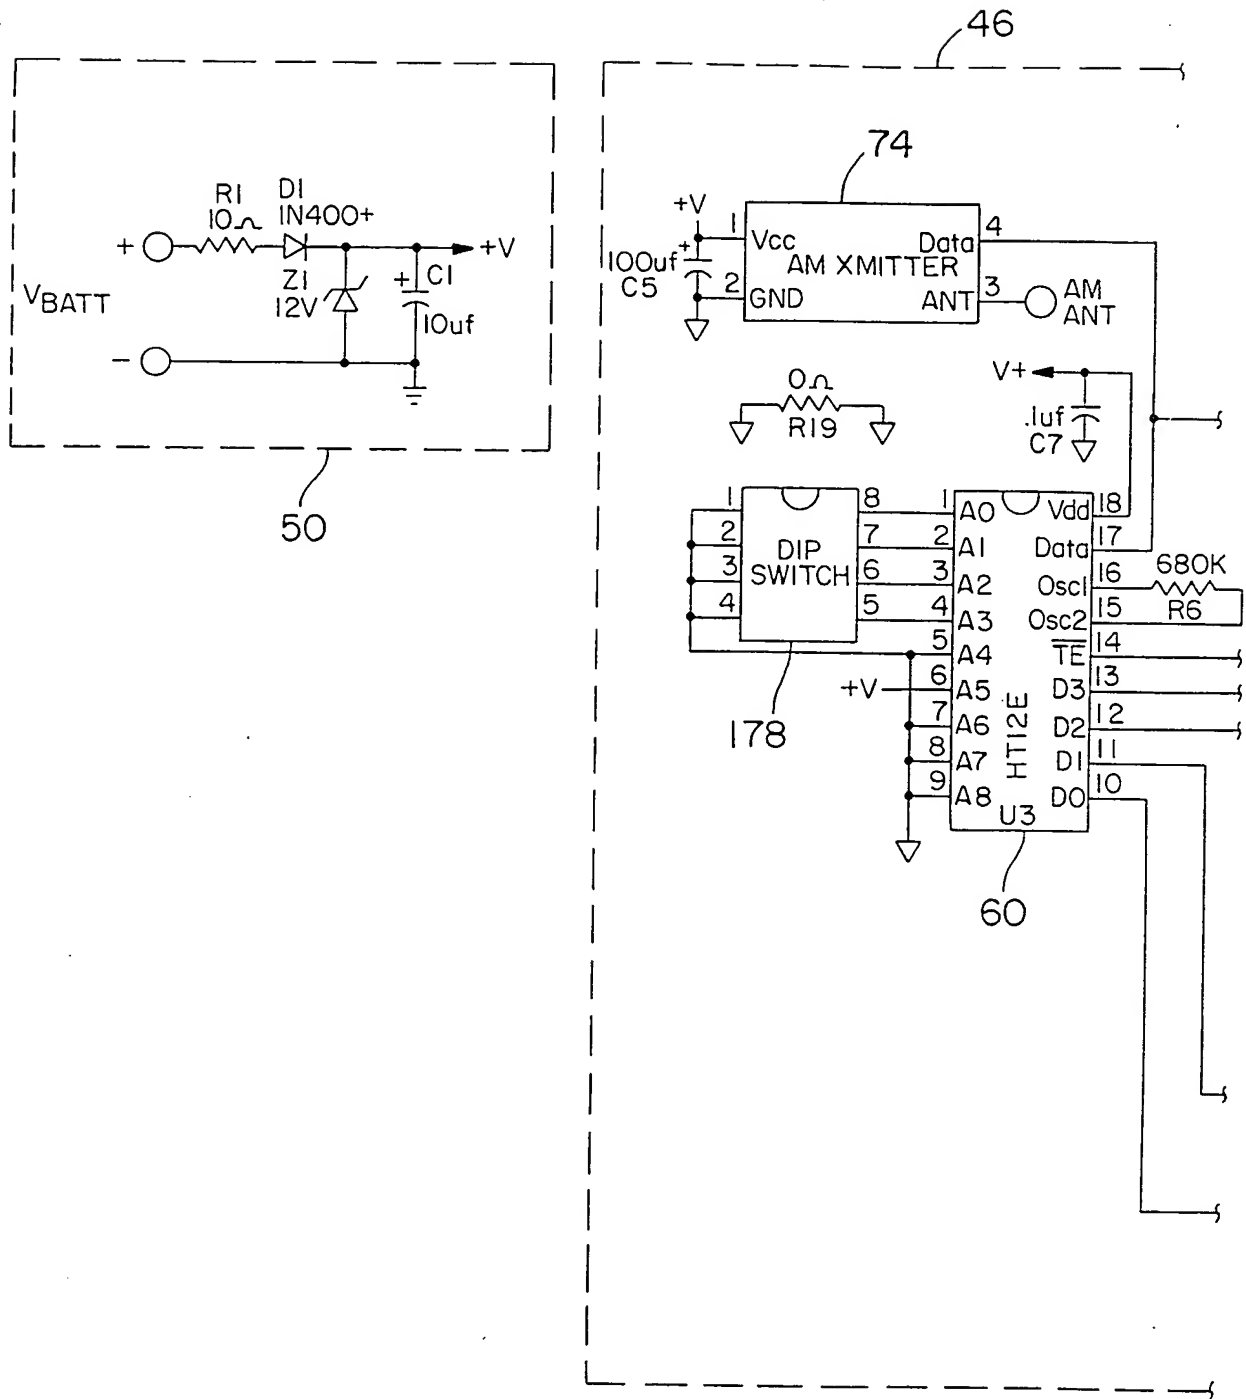


FIG. 3A-1

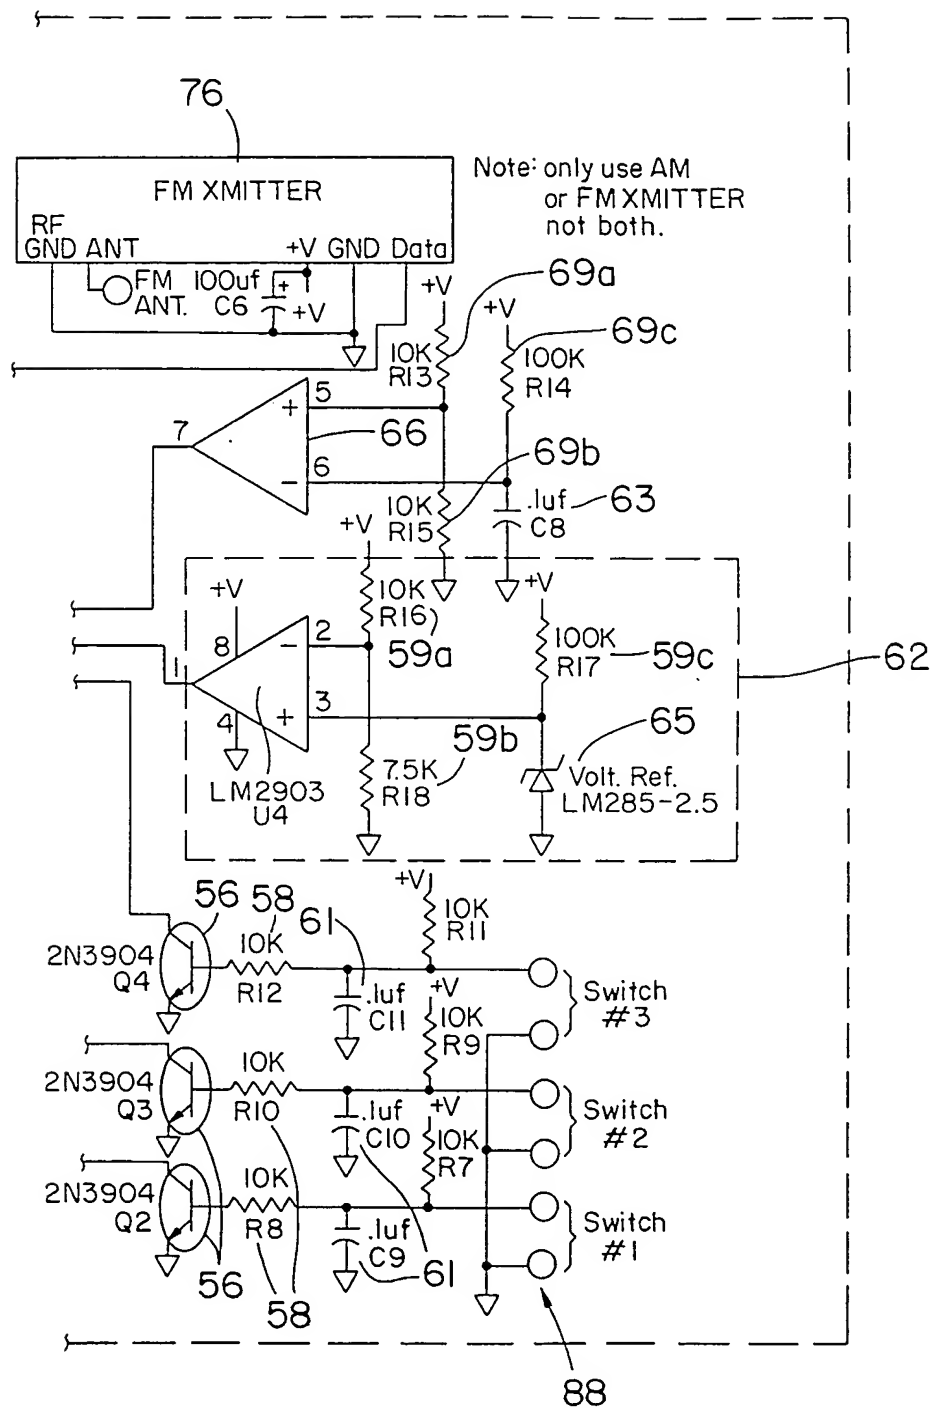


FIG. 3A-2

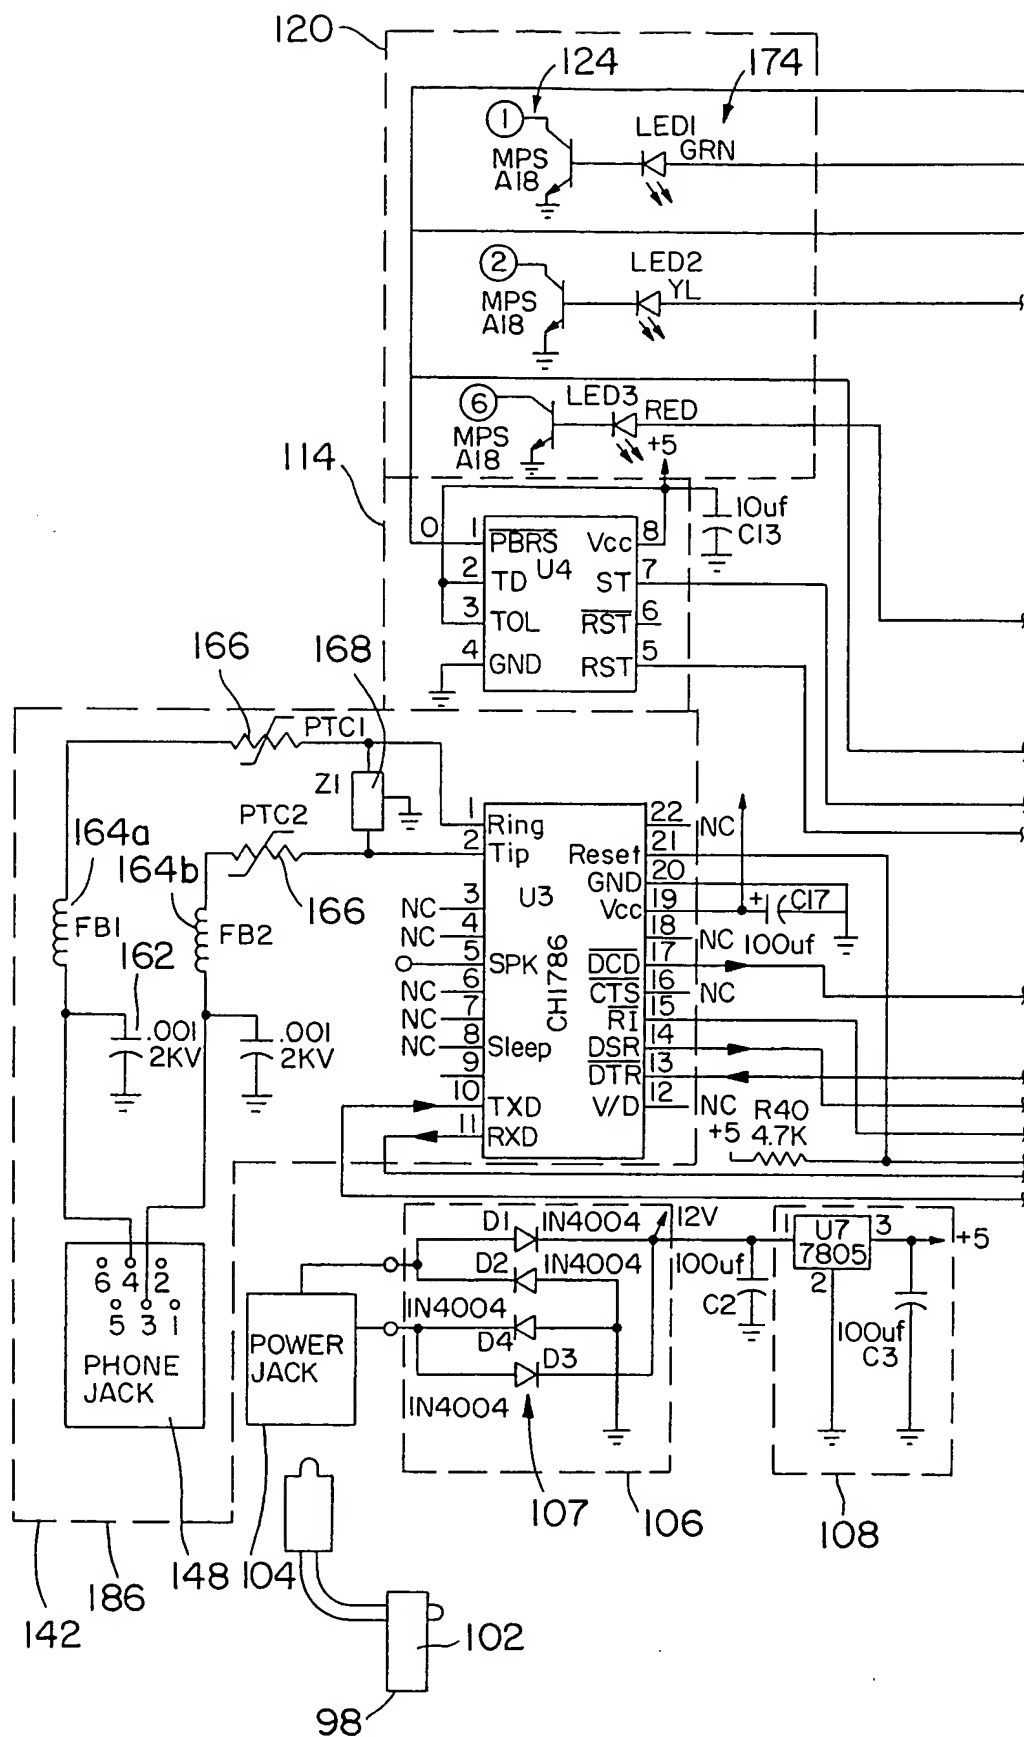


FIG. 3B-1

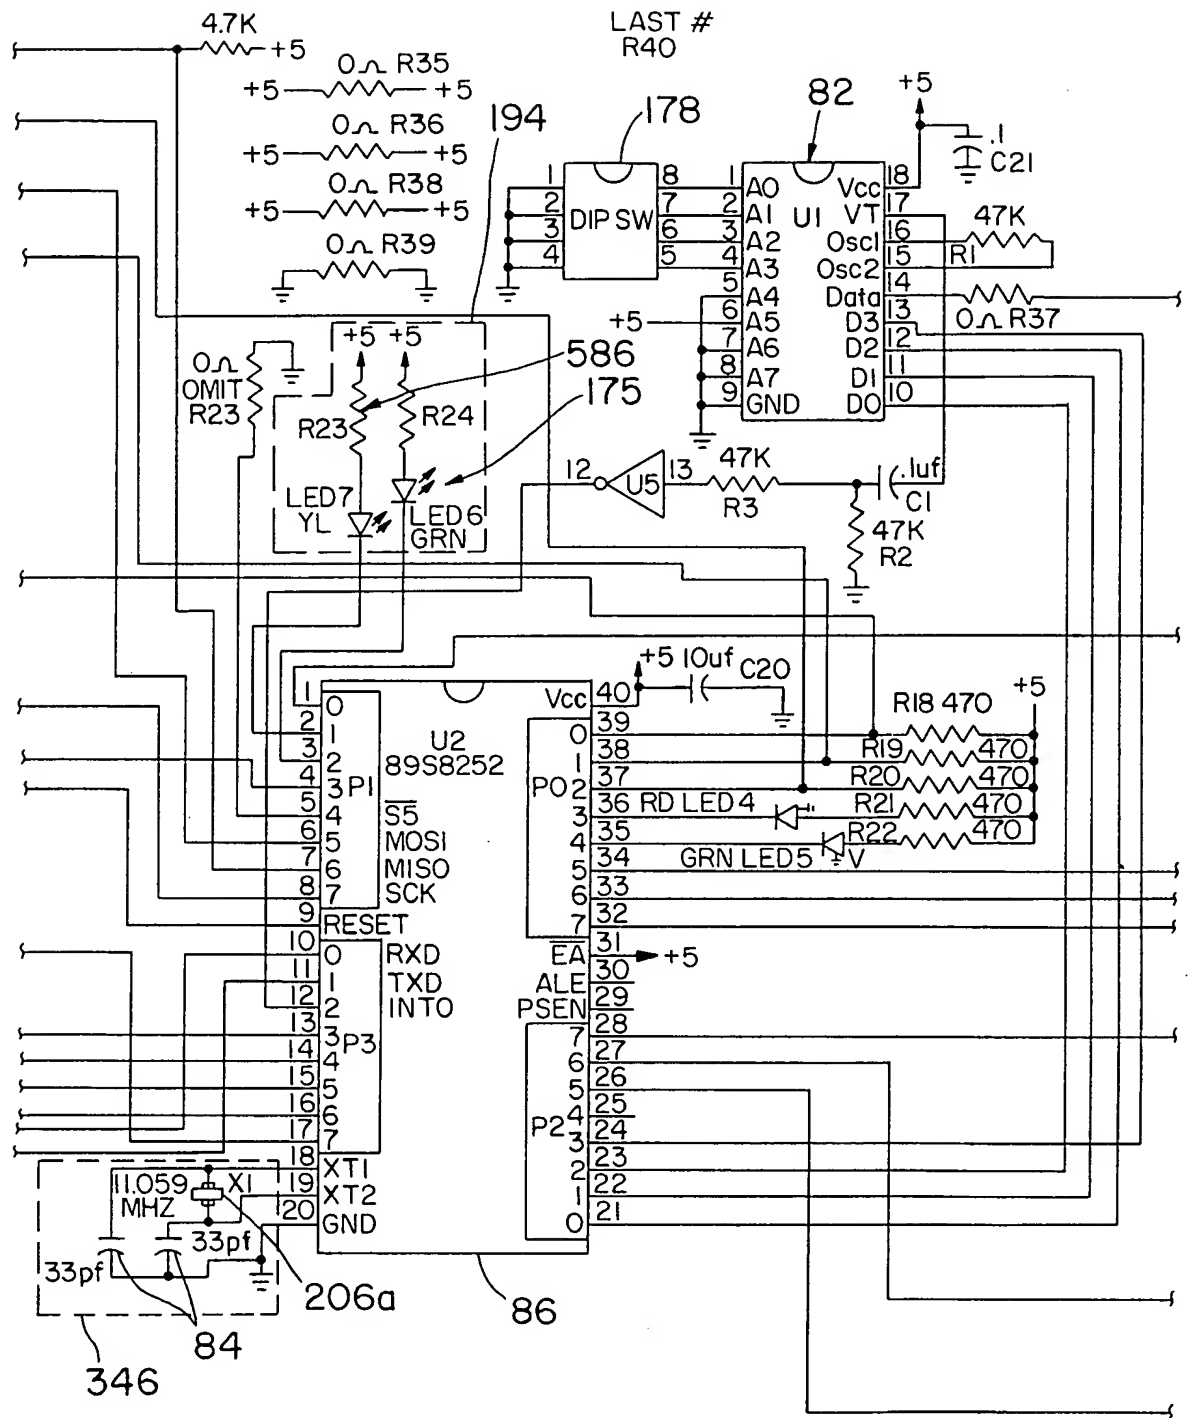


FIG. 3B-2

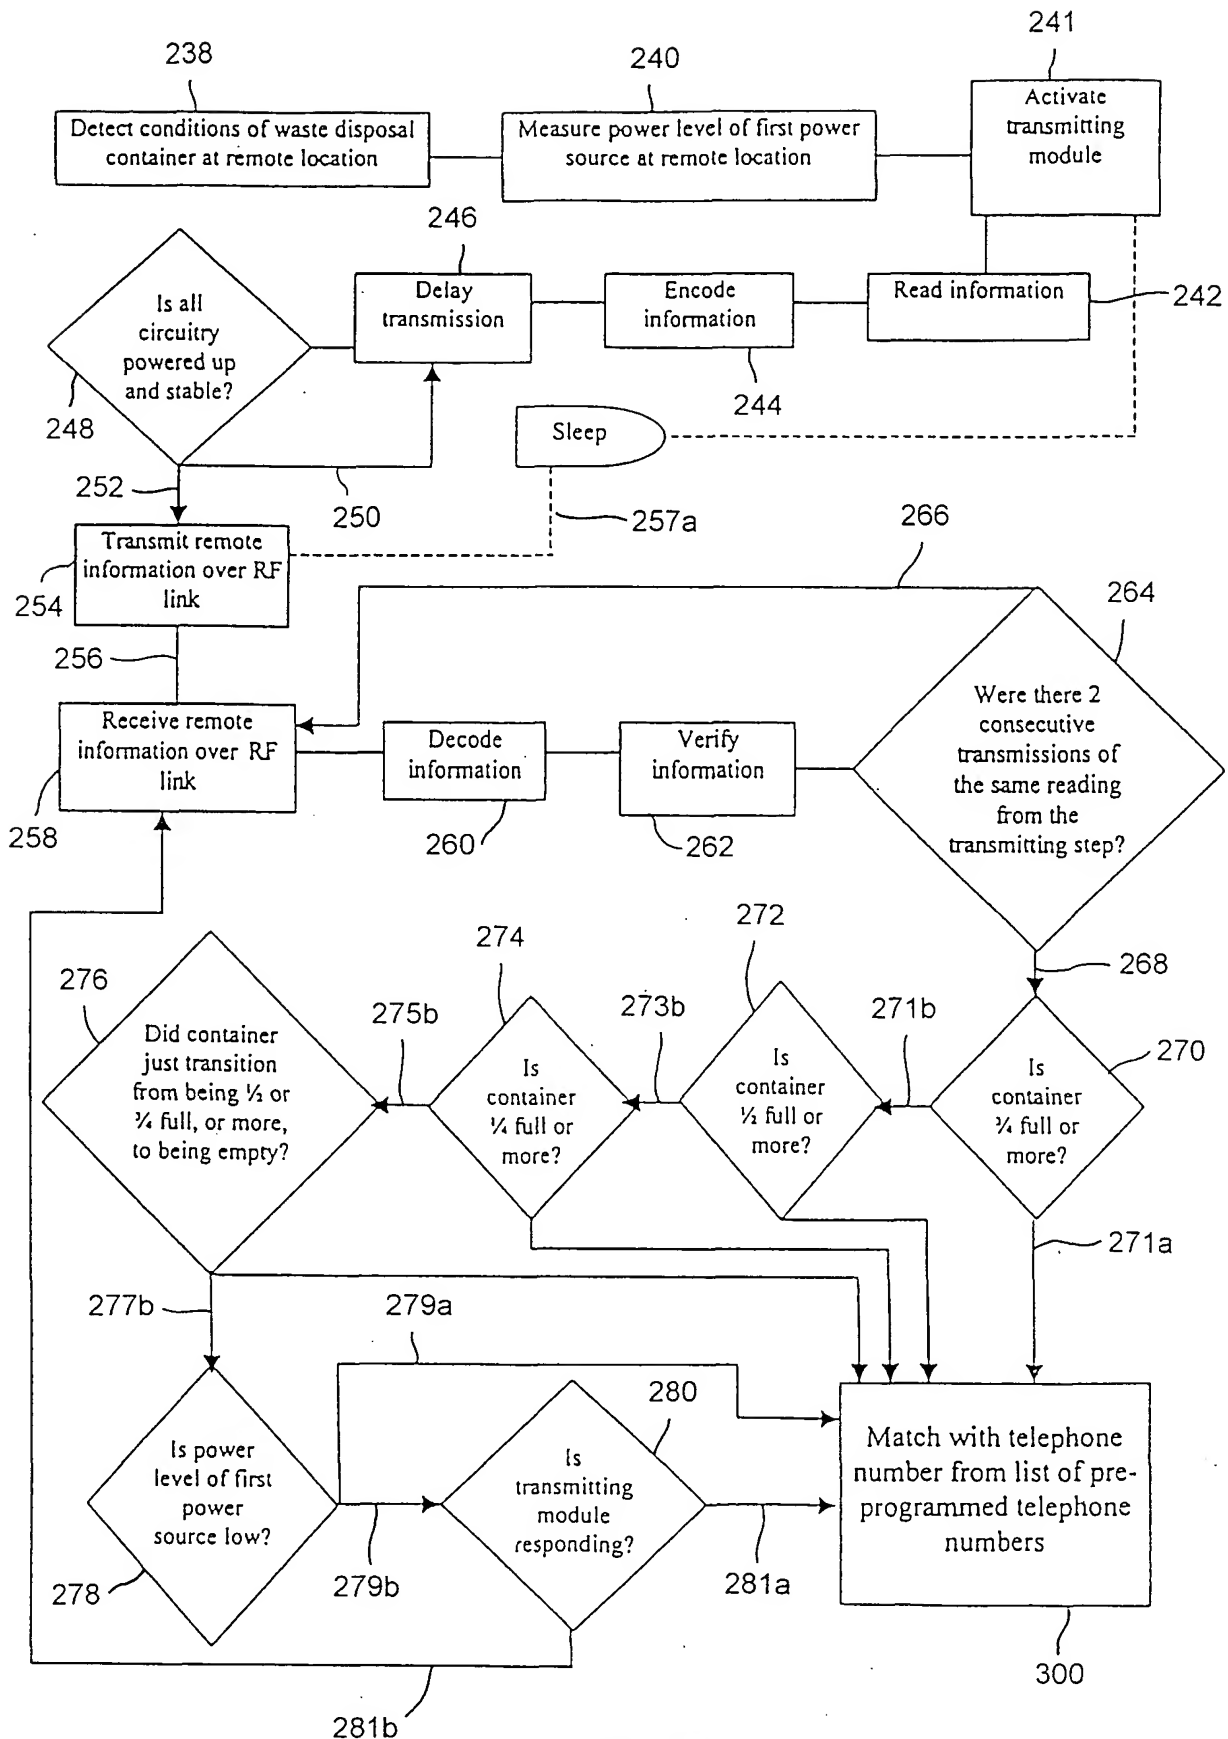


FIG. 4A

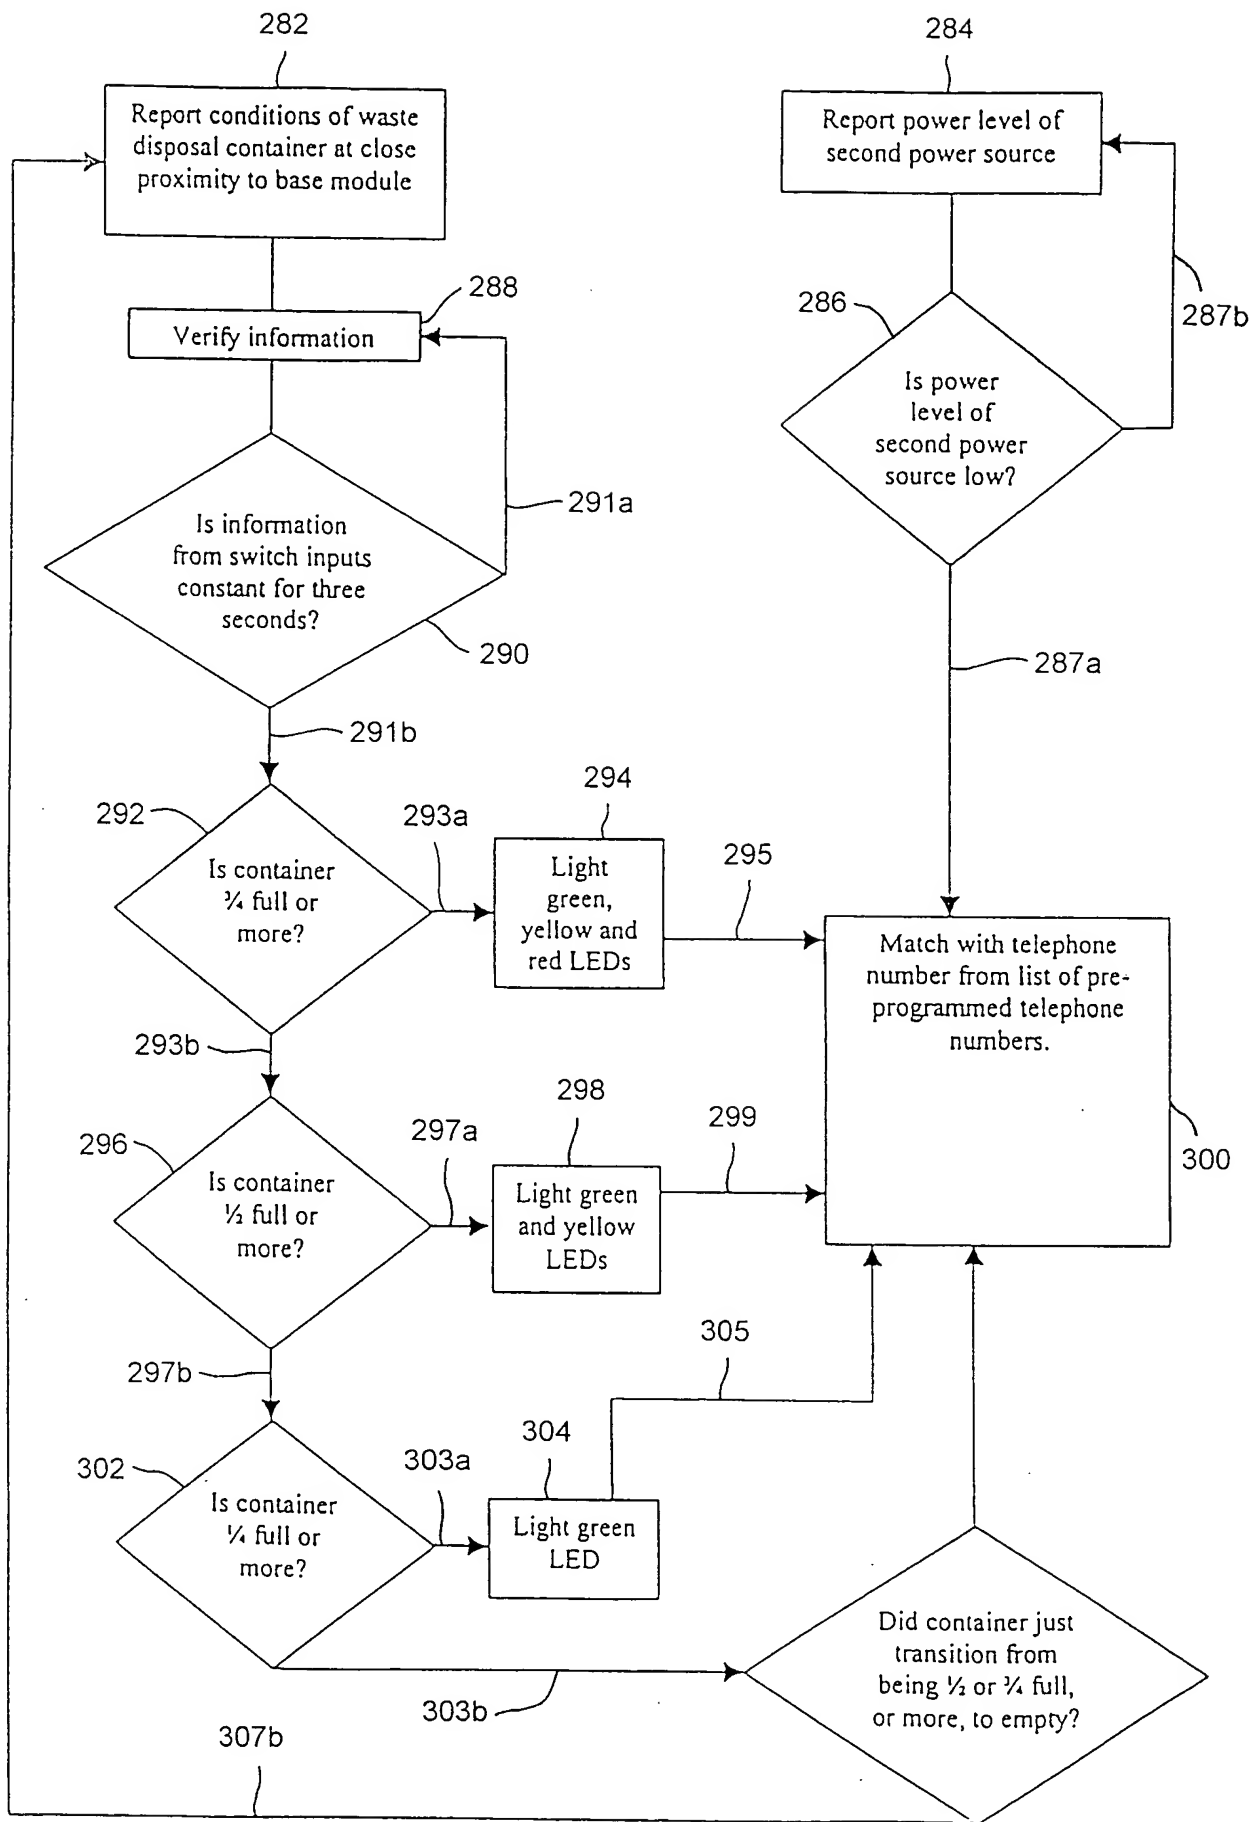


FIG. 4B


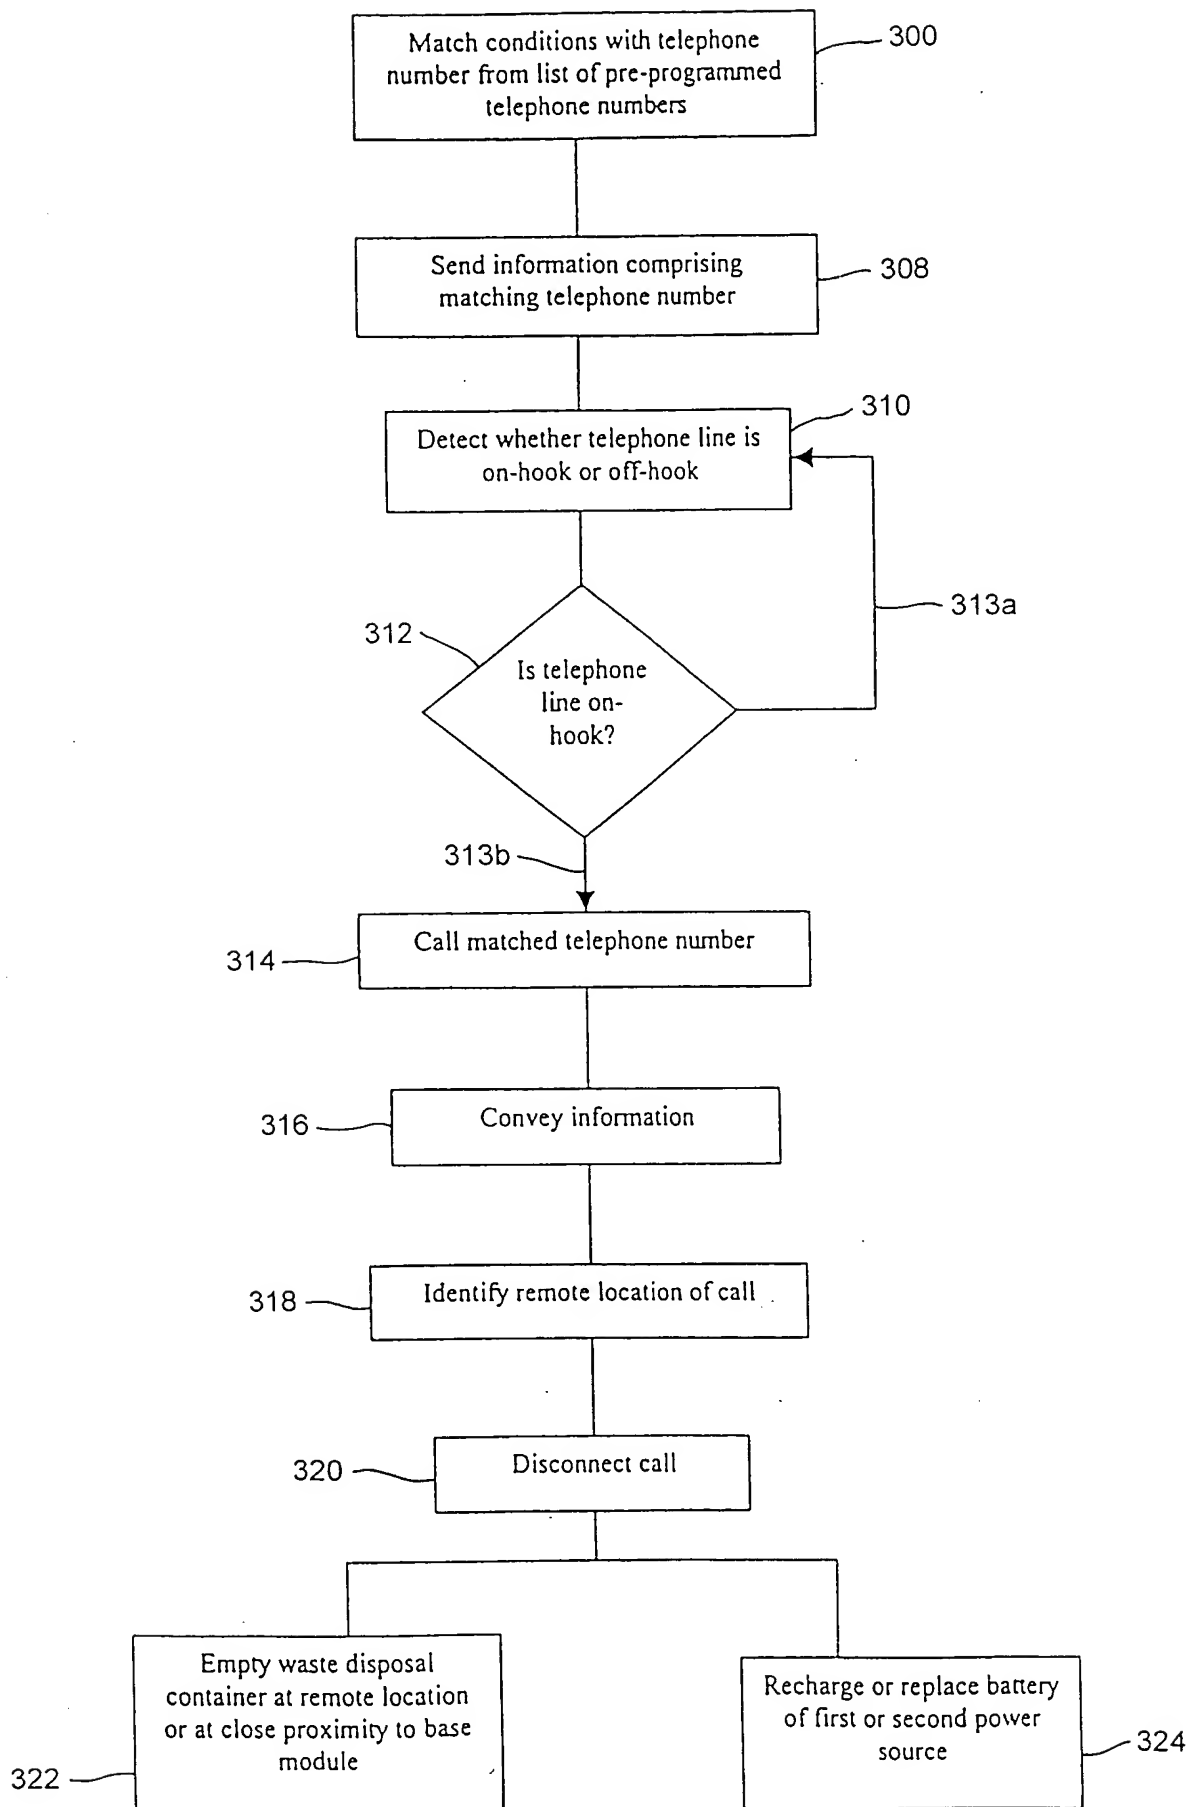


FIG. 4C

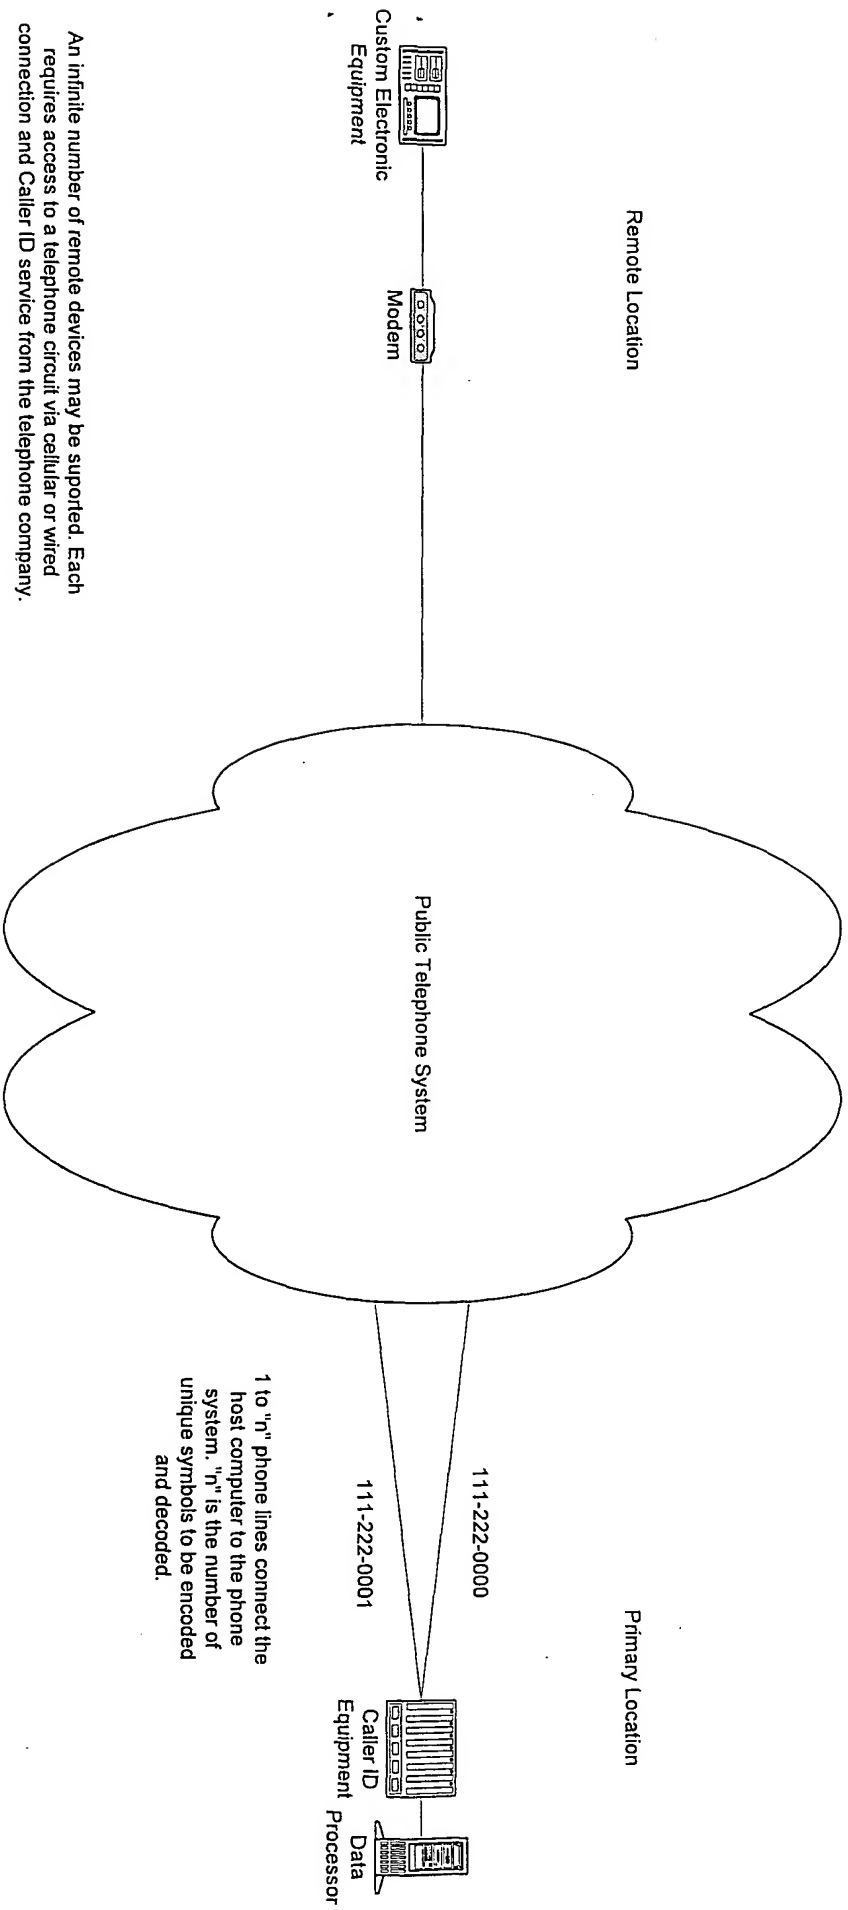

An infinite number of remote devices may be supported. Each requires access to a telephone circuit via cellular or wired connection and Caller ID service from the telephone company.

FIG. 5

Flowchart depicting a remote transmitting a single element of a message.

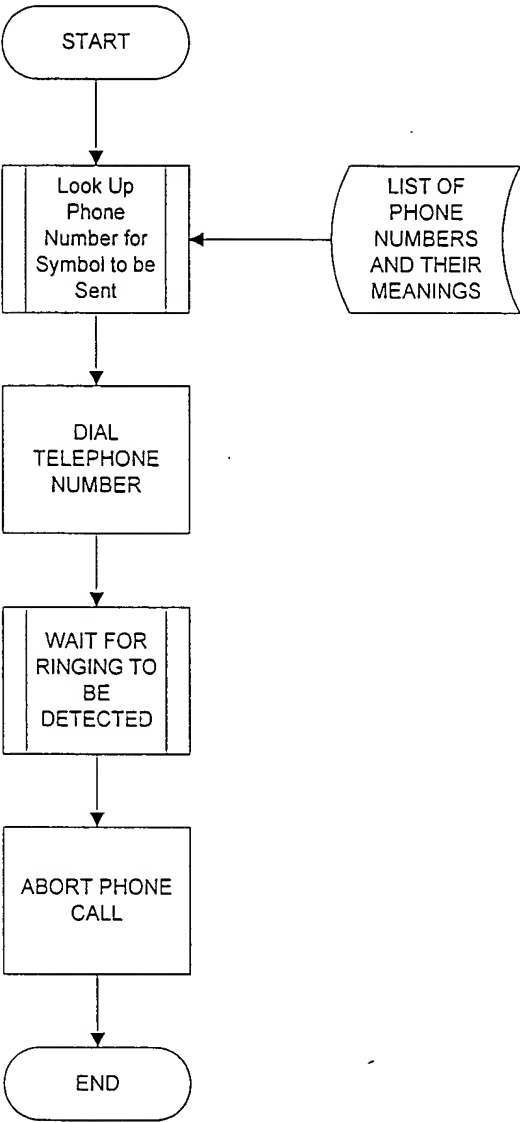


FIG. 6

Flowchart depicting the primary location receiving a single element of a message.

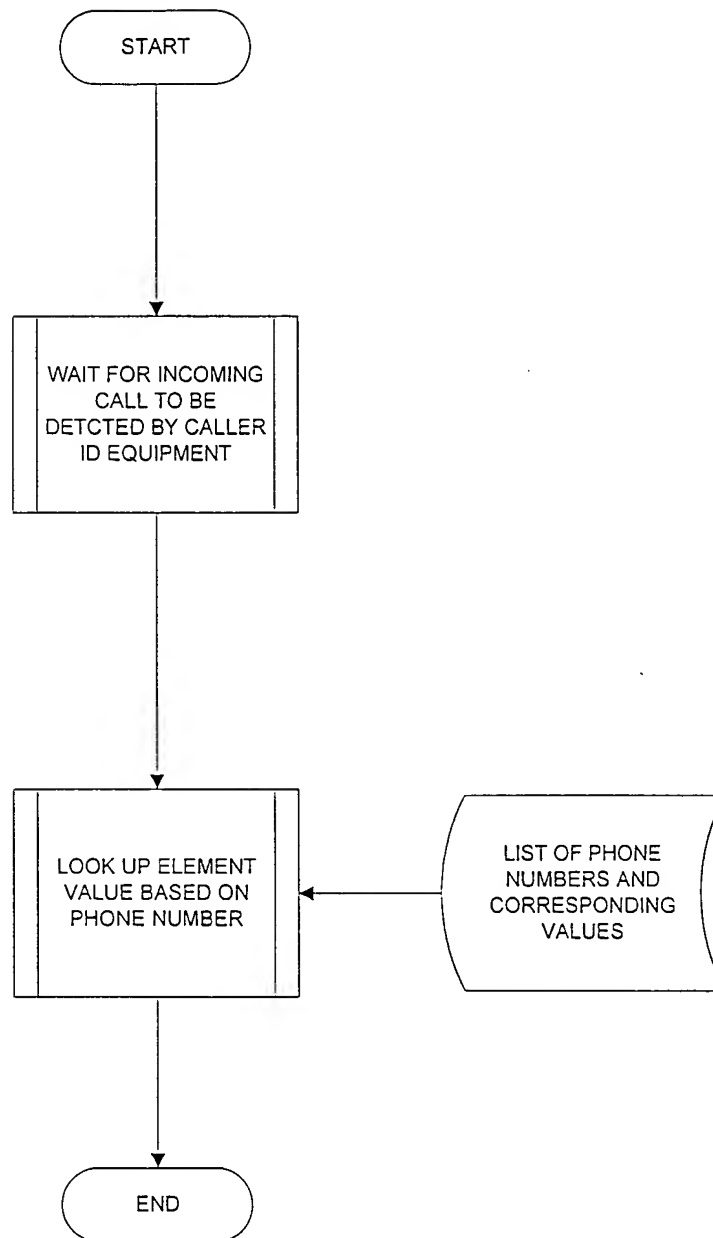


FIG. 7

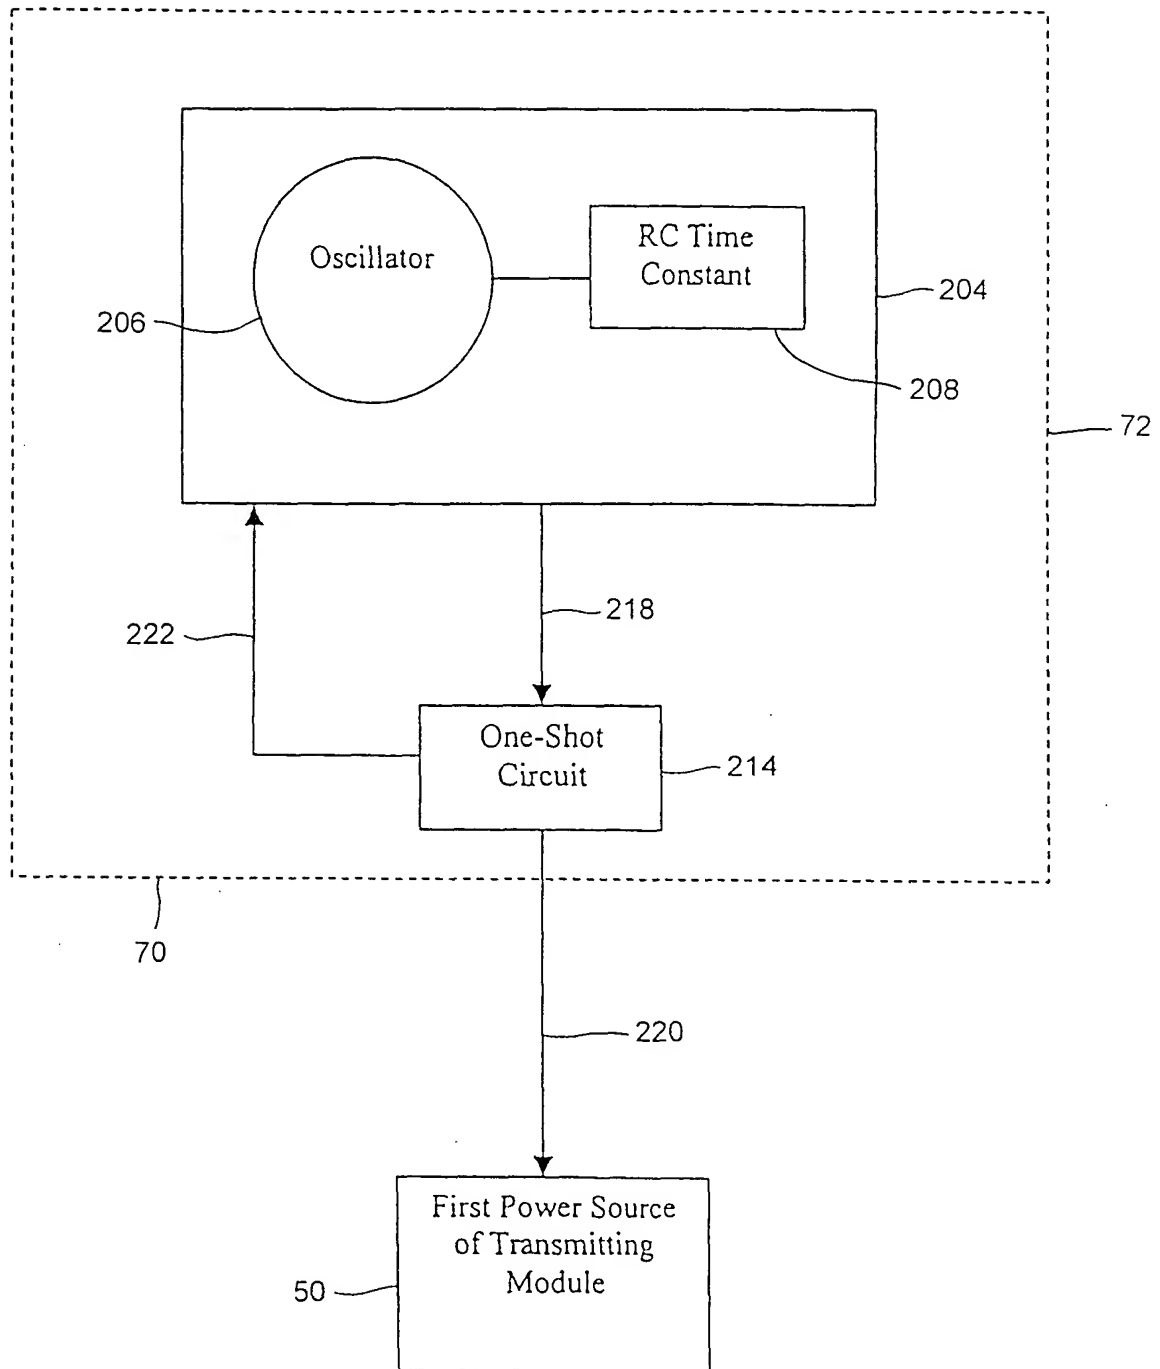


FIG. 8

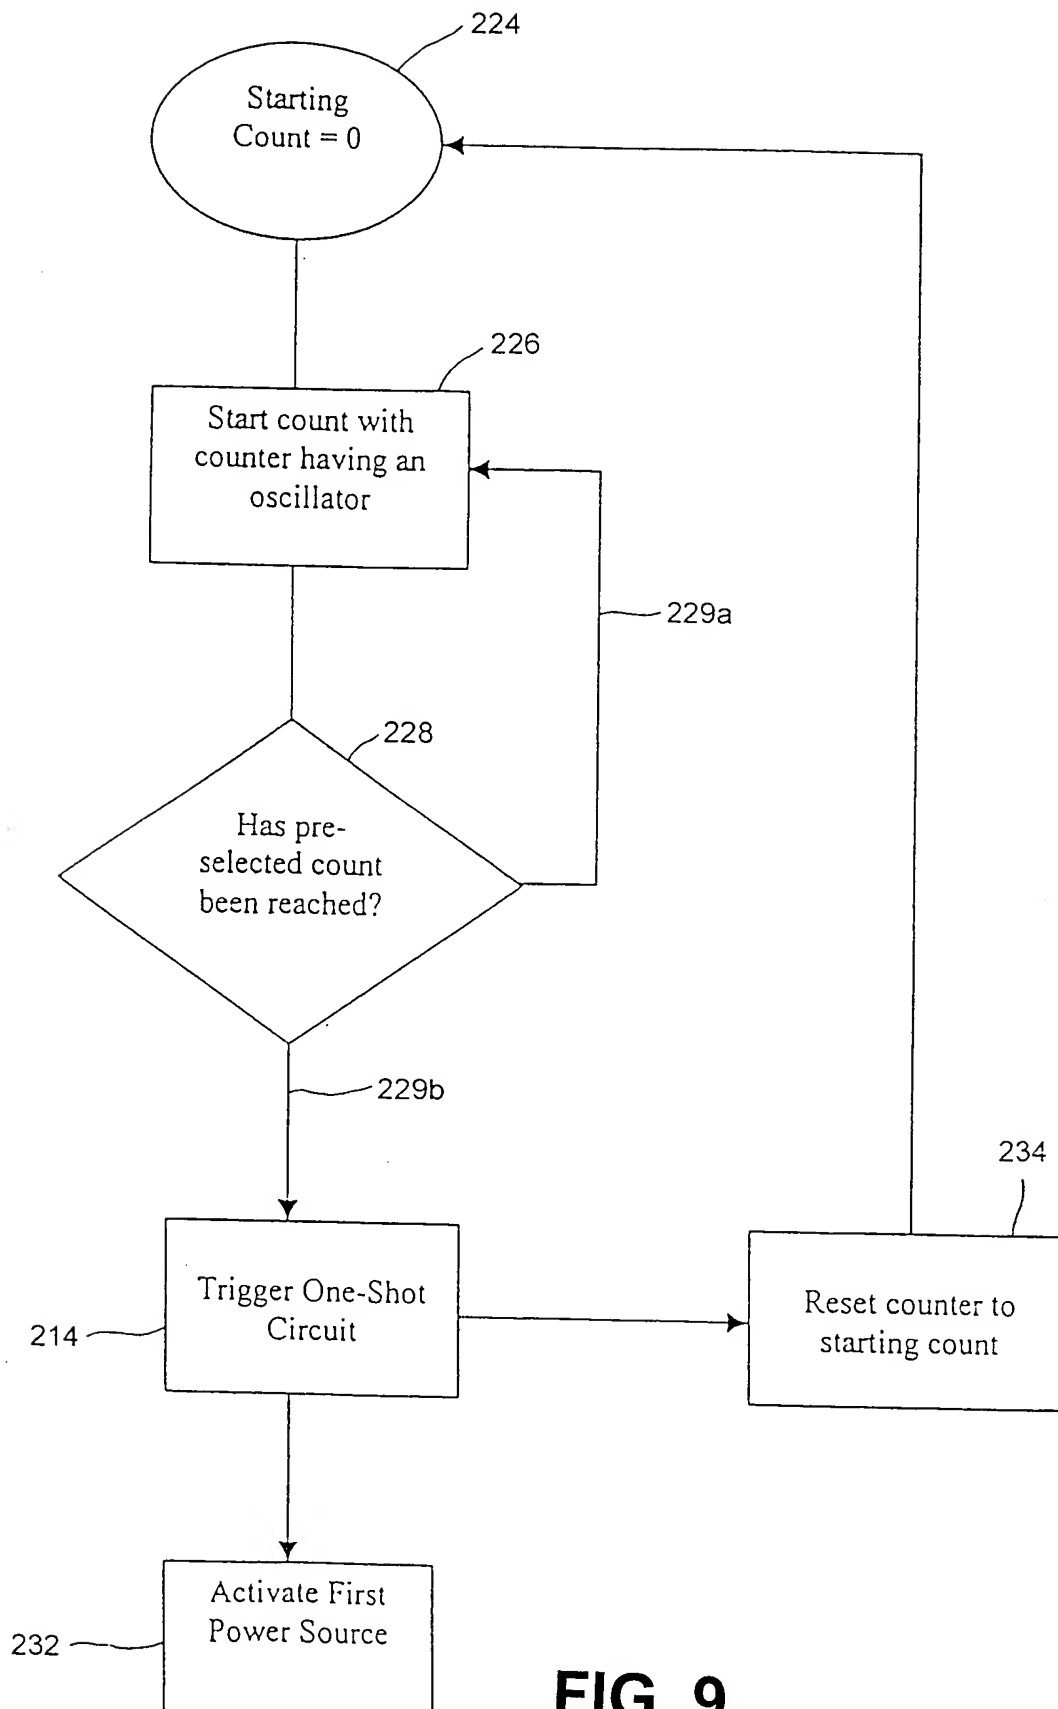


FIG. 9

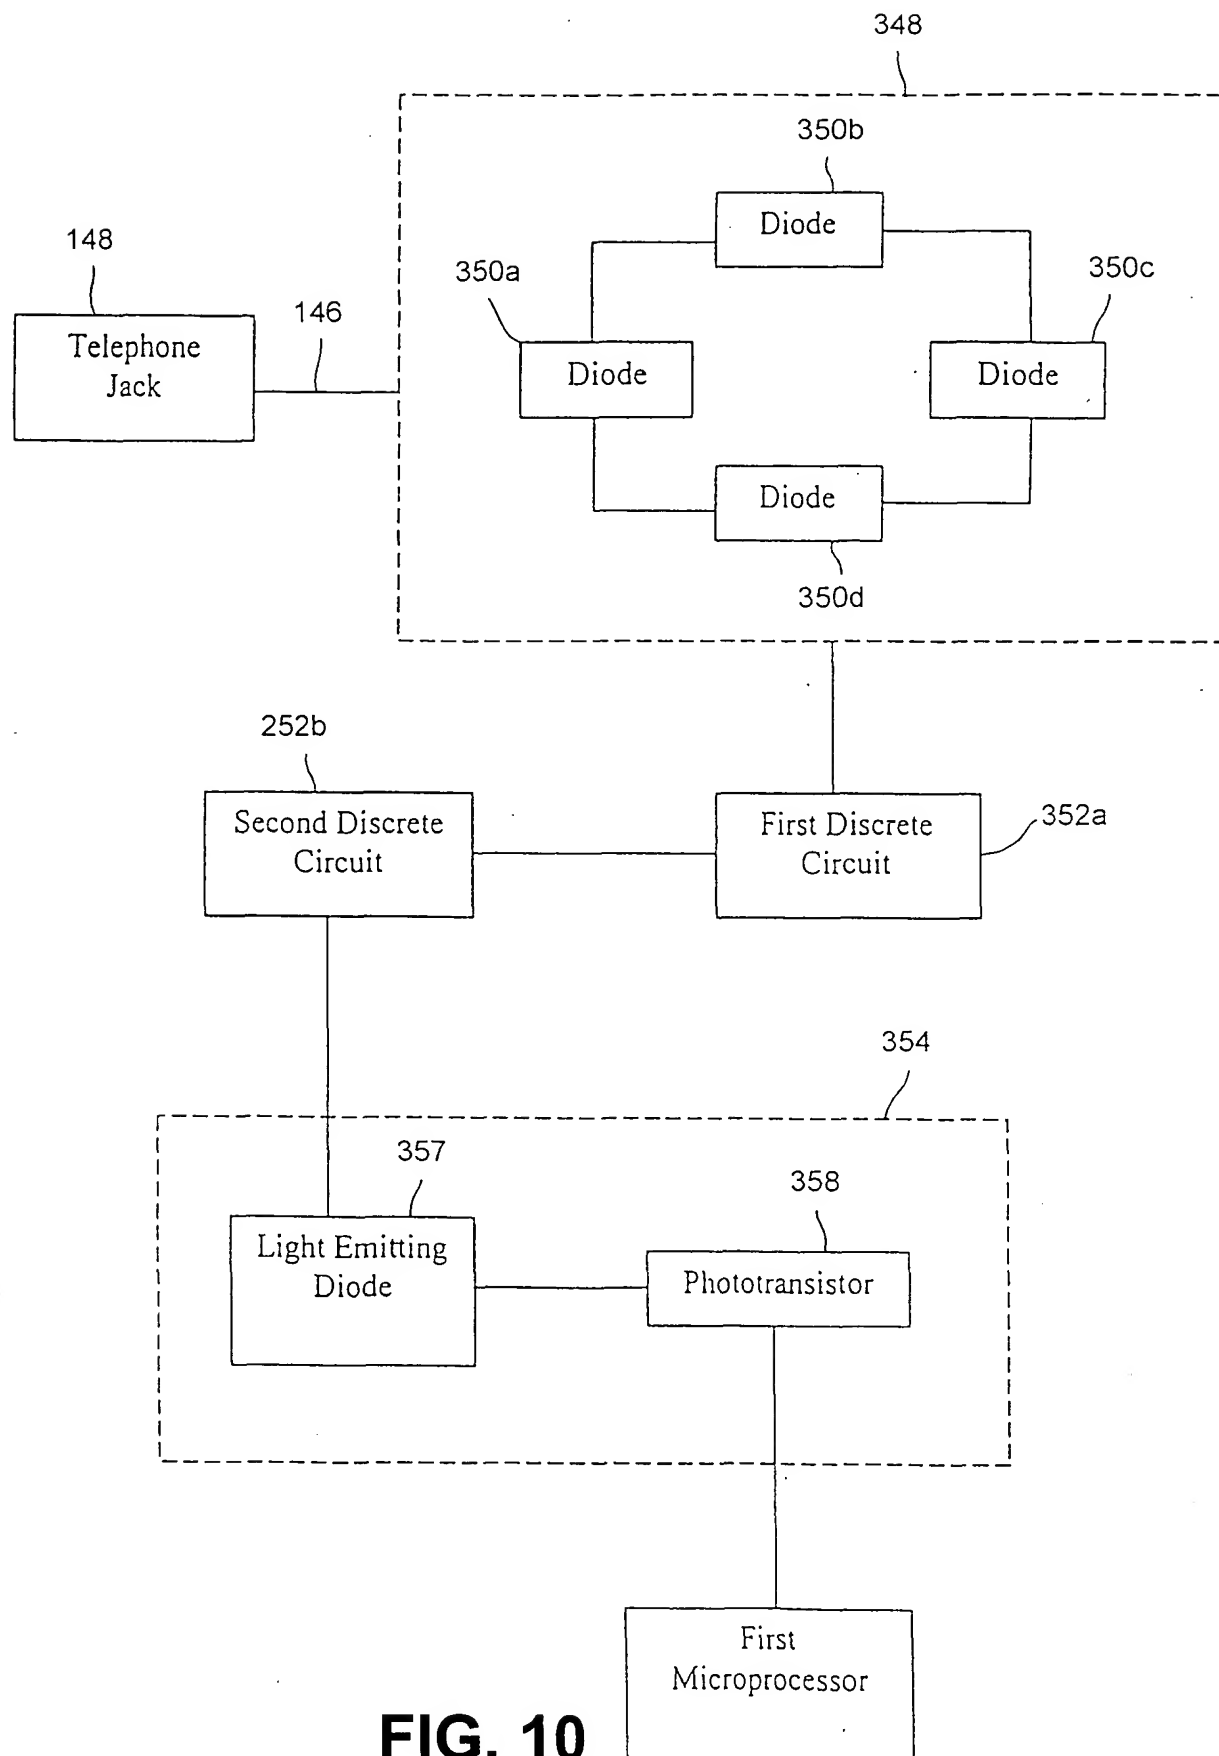


FIG. 10